



BOAT STORAGE

OPTION 1

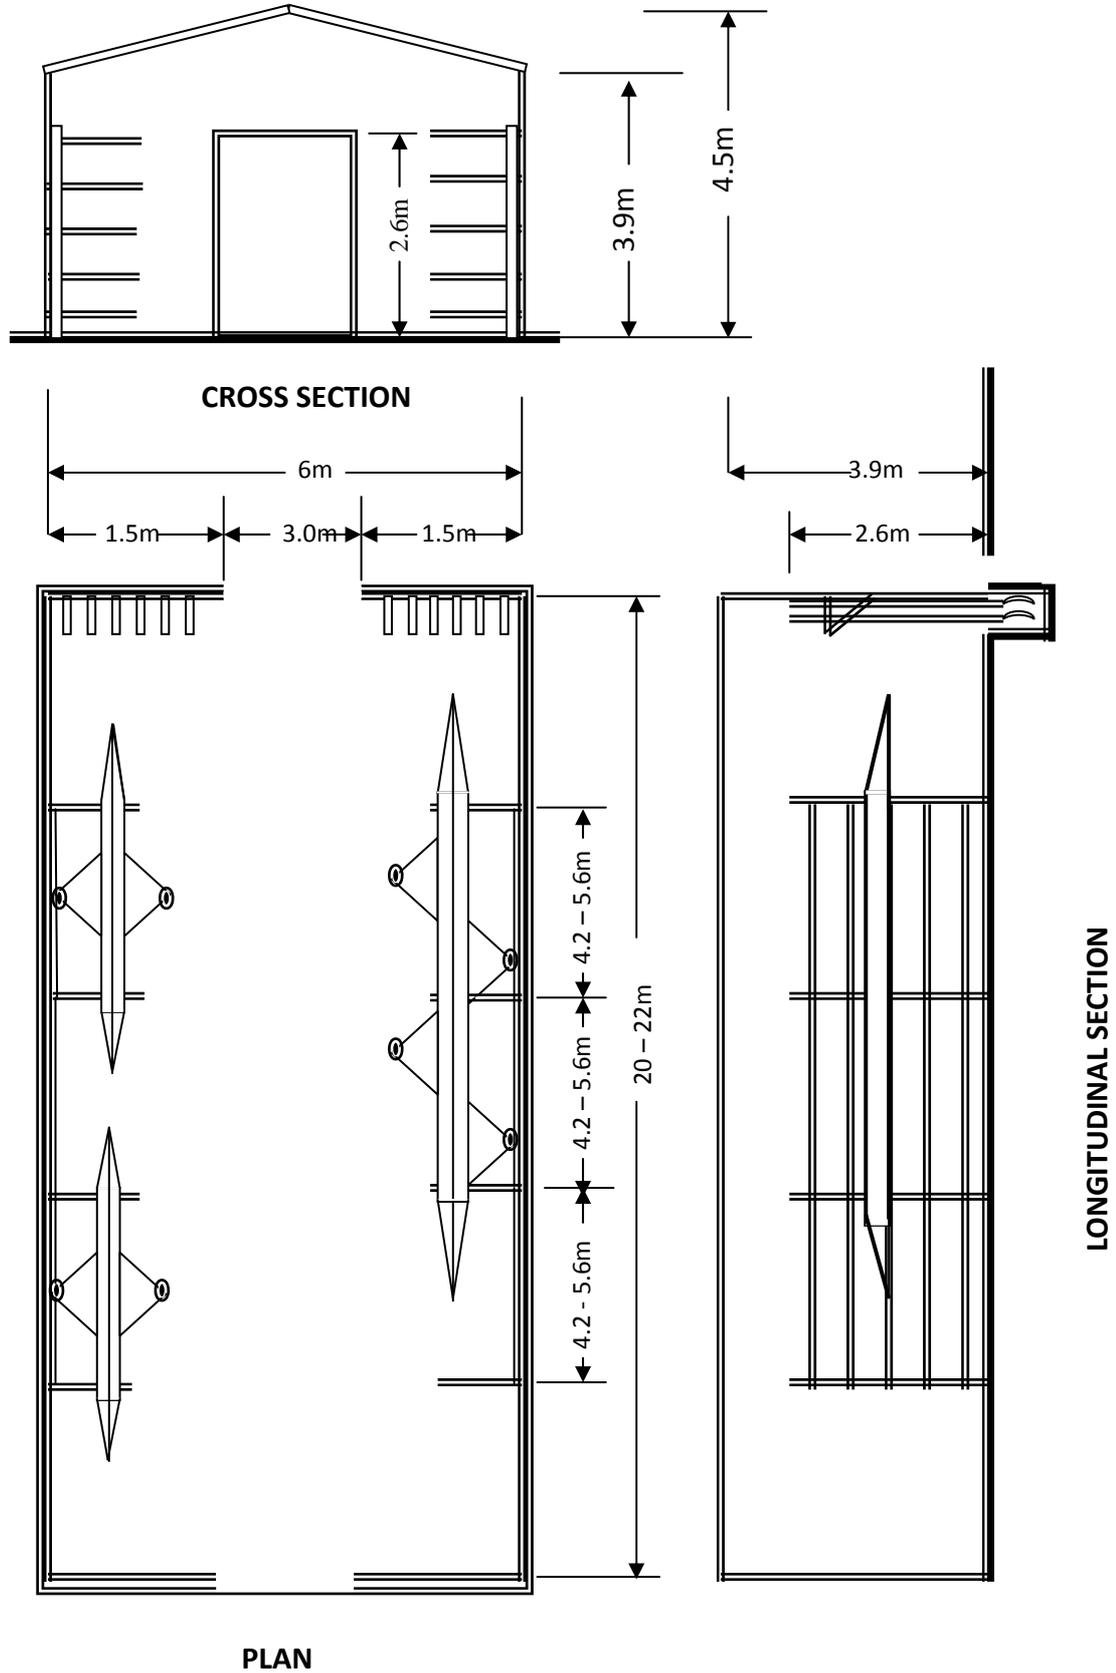


BOAT STORAGE

OPTION 2

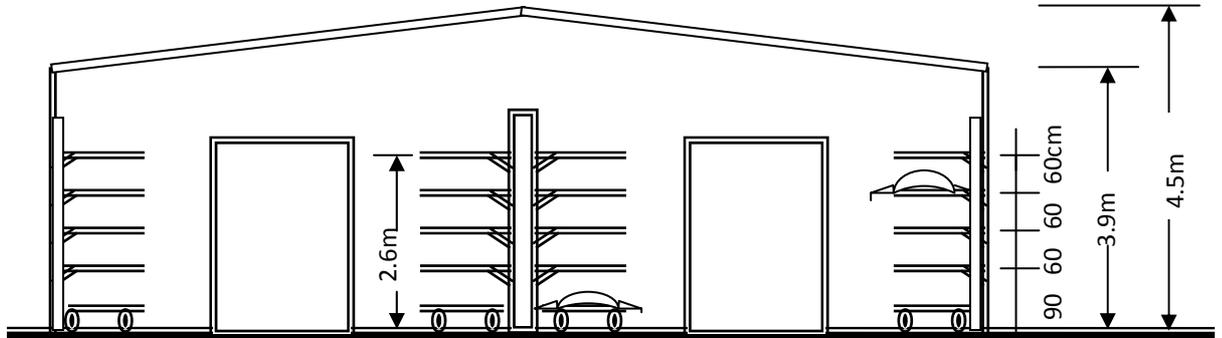

CROSS SECTION

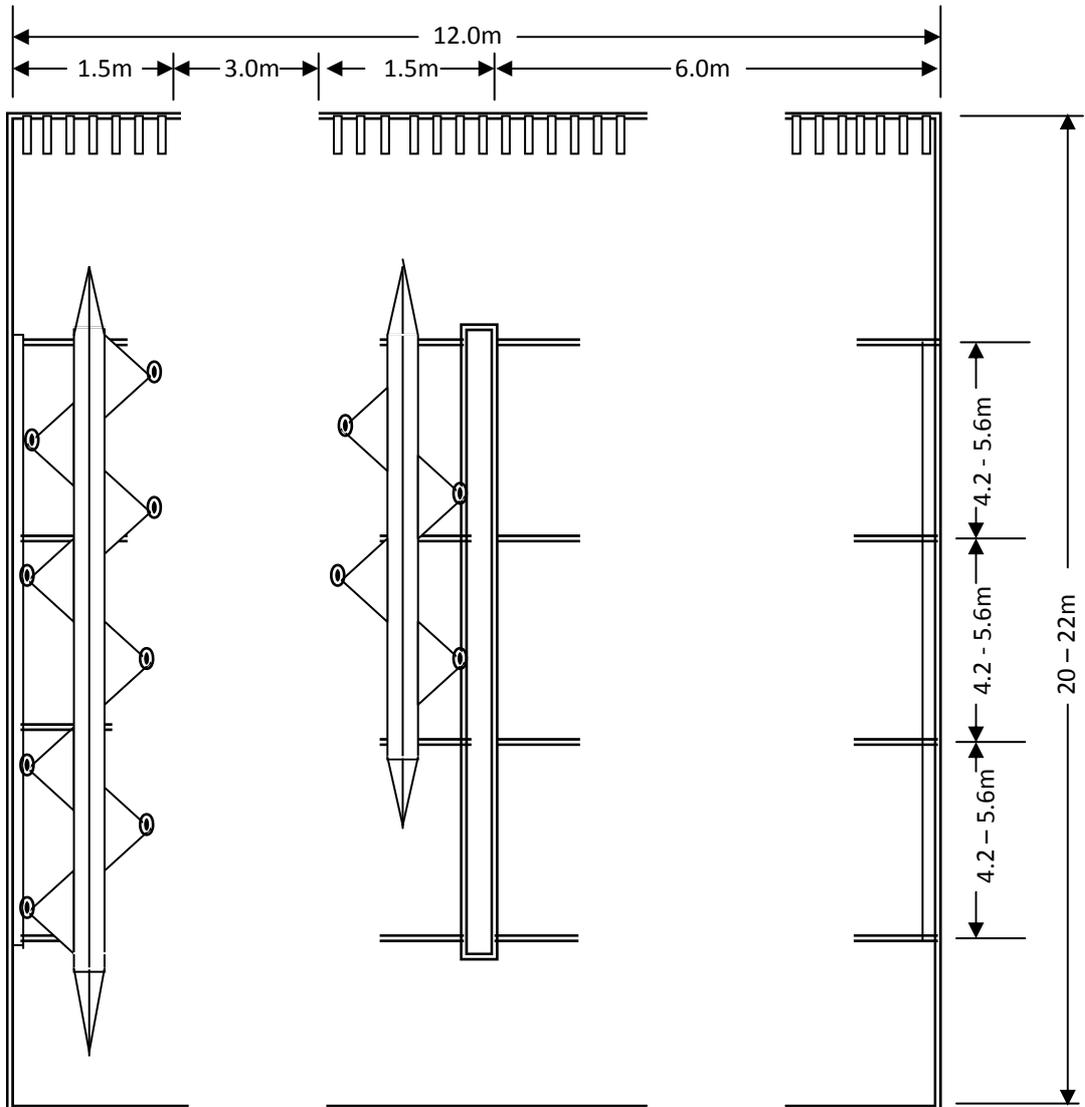


PLAN

RECOMMENDED MEASUREMENTS

Boat Racks

- Units for Eights - 3 supporting racks set 4.2 m apart (or 5.6 m apart).
- Units for Fours - 3 supporting racks set 4.2 m apart (or 5.6 m apart).
- Units for Pairs - 2 supporting racks set 2.8 m apart.
- Alternatively the Pairs and Doubles can also be placed on racks 4.2 m apart but they will then need a V-shaped support under the bow section.
- Units for Singles - 2 supporting racks set 2.8 m/4.2 m.
- Vertical distance – The clear vertical distance between racks should be 60 cm.

TEMPORARY BOAT STORAGE (outdoor)

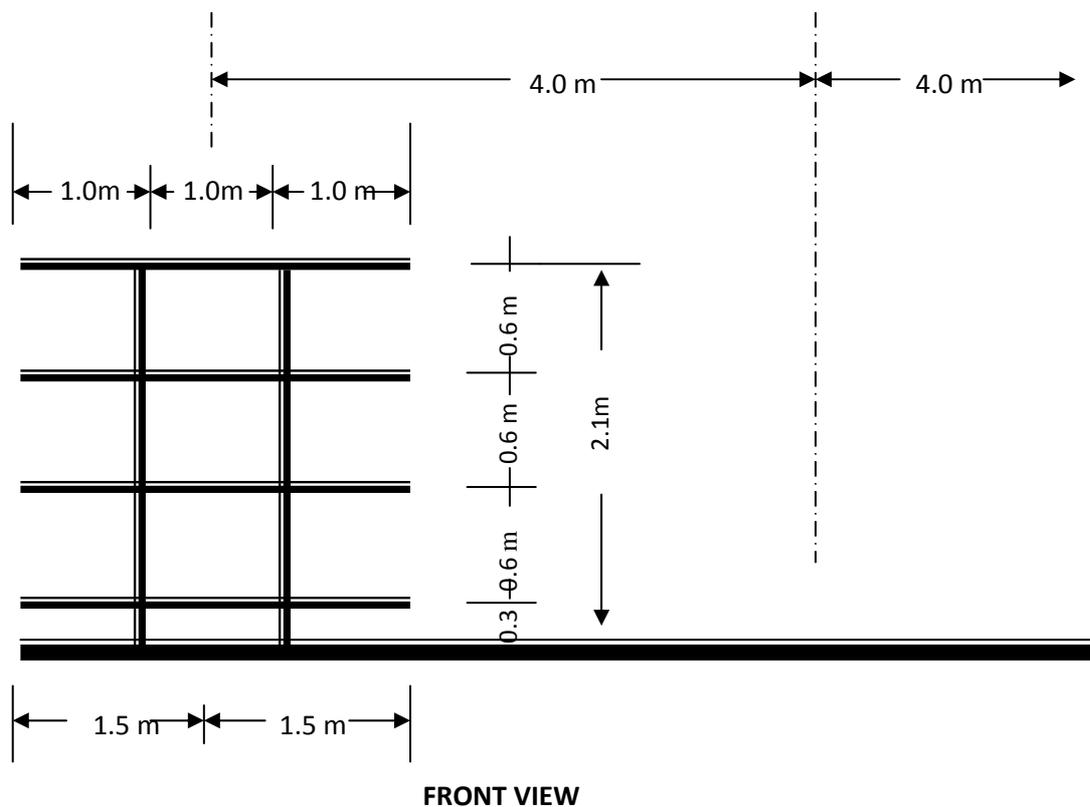

Space between the units – ideally 8m between the centres of the racks to allow for a boat to be set on trestles between the units and to be rigged.

The minimum distance between the centres of the racks could be 6m (ideally 8m).